


# Inca architecture reference

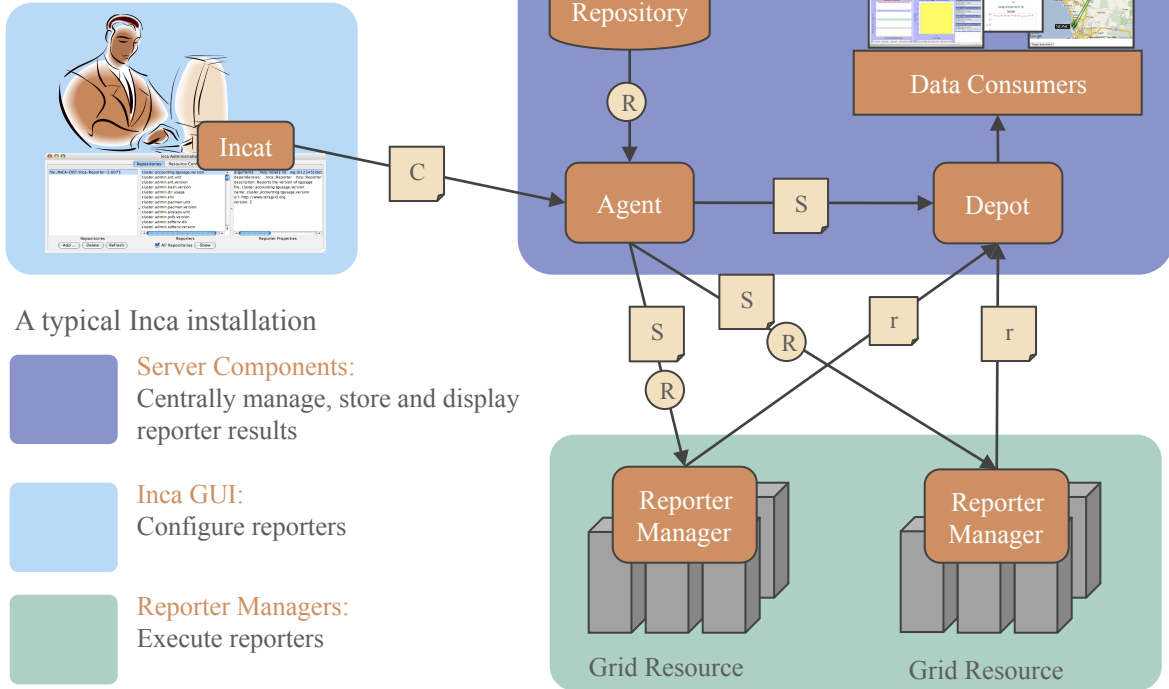

- Agent** An **Agent** is a server that implements the configuration specified by the Inca administrator.
- Data Consumers** A **Data Consumer** is a web container that serves requests to display data from the Depot.
- Depot** A **Depot** is a server that is stores and archives data produced by reporters.
- Incat** **Incat** is a GUI used by the Inca administrator to control and configure the Inca deployment on a set of resources.
- Reporter Manager** A **Reporter Manager** is responsible for managing the schedule and execution of reporters on a single resource
- Reporter Repository** A **Reporter Repository** contains a collection of reporters and is available via an URL.
- R** A **Reporter** is an executable program that tests or measures some aspect of the system or installed software.
- C** A **Config** describes an Inca deployment on a set of resources.
- S** A **Suite** describes a set of reporters to execute on a resource.
- r** A **Report** is the XML output from an executed reporter.